

DMF Contempo is an aesthetic fencing solution that comes with a double wire reinforcement for high panel strength and security.

# CONTEMPO

## Double Wire Fence



### Features and Benefits:

#### > Aesthetic and secure

The perfect combination of aesthetics and security for welded wire fence thanks to the perfectly design panel openings, wire thickness and reinforcement wires on both sides of the fence.

#### > Easy to install

Designmaster - Contempo fencing system is engineered with the right components to facilitate the installation job but keeping strength and security as a priority.

#### > Green


Designmaster fence products are made out of recyclable steel and manufactured with environmentally friendly processes. All products apply for LEED credits.

#### > Durable

Contempo is a long lasting fence as all its elements are galvanized and powder coated with the highest manufacturing standards.

#### > Blends nicely with the landscape

Contempo fits for any fencing project on security, industrial areas, commercial areas, building complexes, schools and playground areas.

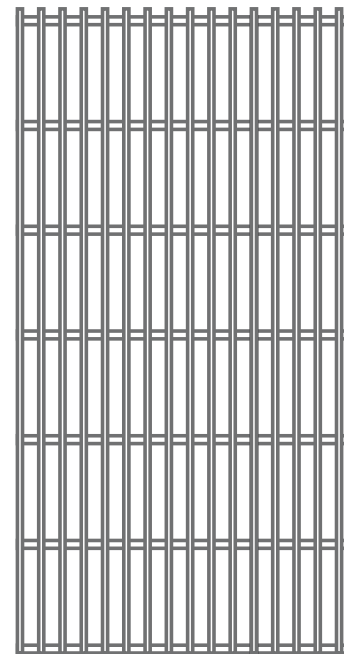

INTERCHANGEABLE  
PANELS



AESTHETICS



DURABILITY



EASY  
INSTALLATION



WEATHER  
RESISTANT

# TECHNICAL SPECS


## PANEL SPECS:

OPENING 1.968" x 7.874" (50 x 200 mm)			
Height (')	Length (')	Vertical Wire Gauge (')	Horizontal Wire Gauge (')
4	8.2' (98")	4	1/0
6	8.2' (98")	4	1/0
8	8.2' (98")	4	1/0

## POST SPECS:

Panel height	ft	4	6	8
Post height	ft	5.8	8.1	10.1
Flat bar height	ft	4.05	6.02	7.99
Number of locks		4	6	7
Number of caps		1	1	1
Number of nuts and bolts	each	4	6	7
Post foundation	ft	1.6	2	2

- > Pipe, galvanized and powder coated
- > Reinforcement flat bar dimensions: 3/16" x 1/2"
- > Post dimensions: 1 1/2" x 2 1/2"
- > Nuts and bolts dimensions: 5/16"

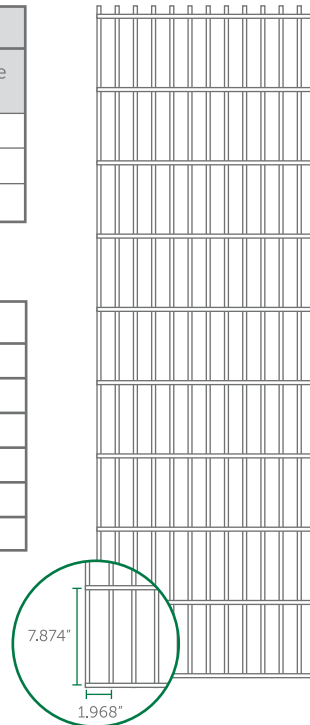

## WIRE SPECS:

- > All wires are electro welded, galvanized and powder coated

VERTICAL WIRES	HORIZONTAL WIRES
Gauge 4 (6 mm)	Gauge 1/0 (8 mm)
Zinc coating: 0.30 oz/sq ft (ASTM A-641)	Zinc coating: 0.30 oz/sq ft (ASTM A-641)
Wire breaking load: 75,000 - 105,000 PSI	Wire breaking load: 75,000 - 105,000 PSI

## REINFORCEMENT BAR SPECS:

- > Galvanized and painted
- > Flat bar: 3/16" x 1 1/2"
- > Uses one way stainless steel nuts and bolts

<b>Steel</b>	Steel NF-EN-10016 6-2	<b>Finish - Powder coating</b>
<b>Composition</b>	Powder Coating _____ Phosphate _____ Zinc coating _____ Steel _____	
<b>Colors</b>	Green Black Brown White	<b>10 year warranty</b>

Meets: ASTM A-510 | ASTM A-641

Call toll free:

**1 800 332 2376 USA • 1 877 343 8575 Canada**

8411 Irvington Blvd Ste B, Houston, Texas 77022 [designmasterfence.com](http://designmasterfence.com)



MANUFACTURED BY



## FENCE INSTALLATION:

Fencing system comes with the right components for a perfect installation:

- Posts
- Synthetic retainers
- Strap fasteners
- Reinforcement flat bar
- Safety screws
- Plastic caps

## FEATURES

All fencing components except the nuts and bolts are powder coated.

